

(12) ~~INTERNATIONAL~~ 51516

PATENT APPLICATION PUBLISHED UNDER
THE PATENT COOPERATION TREATY (PCT)

(19) ~~World Intellectual Property Organization~~ ~~[WIPO]~~ ~~[Bar Code]~~
~~International Bureau~~

(43) ~~International Publication Date~~ ~~July 28, 2005 (07/28/2005)~~ (10) ~~International Publication Number~~
~~PCT~~ WO 2005/068848 A1

(51) ~~International Patent Classification⁷~~: F15B 1/22 1/24,
F16L 55/04

(21) ~~International Application No.:~~ PCT/EP2004/014051

(22) ~~International Filing Date:~~
December 10, 2004 (12/10/2004)

(25) ~~Language in which the international application was~~
~~originally filed:~~ German

(26) ~~Language in which the international application is~~
~~published:~~ German

(30) ~~Priority Data:~~
10 2004 002 266.6 January 16, 2004 (01/16/2004) DE

(71) ~~Applicant (for all designated states except the U.S.):~~
HYDAC TECHNOLOGY GMBH [DE/DE];
Industriegebiet, 66280 Sulzbach/Saar (DE).

(72) ~~Inventor:~~

(75) ~~Inventor/Applicant (U.S. only):~~ WEBER, Norbert
[DE/DE]; Mozartstrasse 5, 66280 Sulzbach/Saar
(DE).

(74) ~~Representative:~~ BARTELS AND PARTNER; Lange
Strasse 51, 70174 Stuttgart (DE).

(81) ~~Designated States (unless indicated otherwise, for~~
~~each available type of national protective right):~~ AE,
AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW,
BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK,
DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
YU, ZA, ZM, ZW.

[continued on next page]

(54) ~~Title:~~

of


NORBERT WEBER

for

PISTON-TYPE ACCUMULATOR



WO 2005/068848 A1

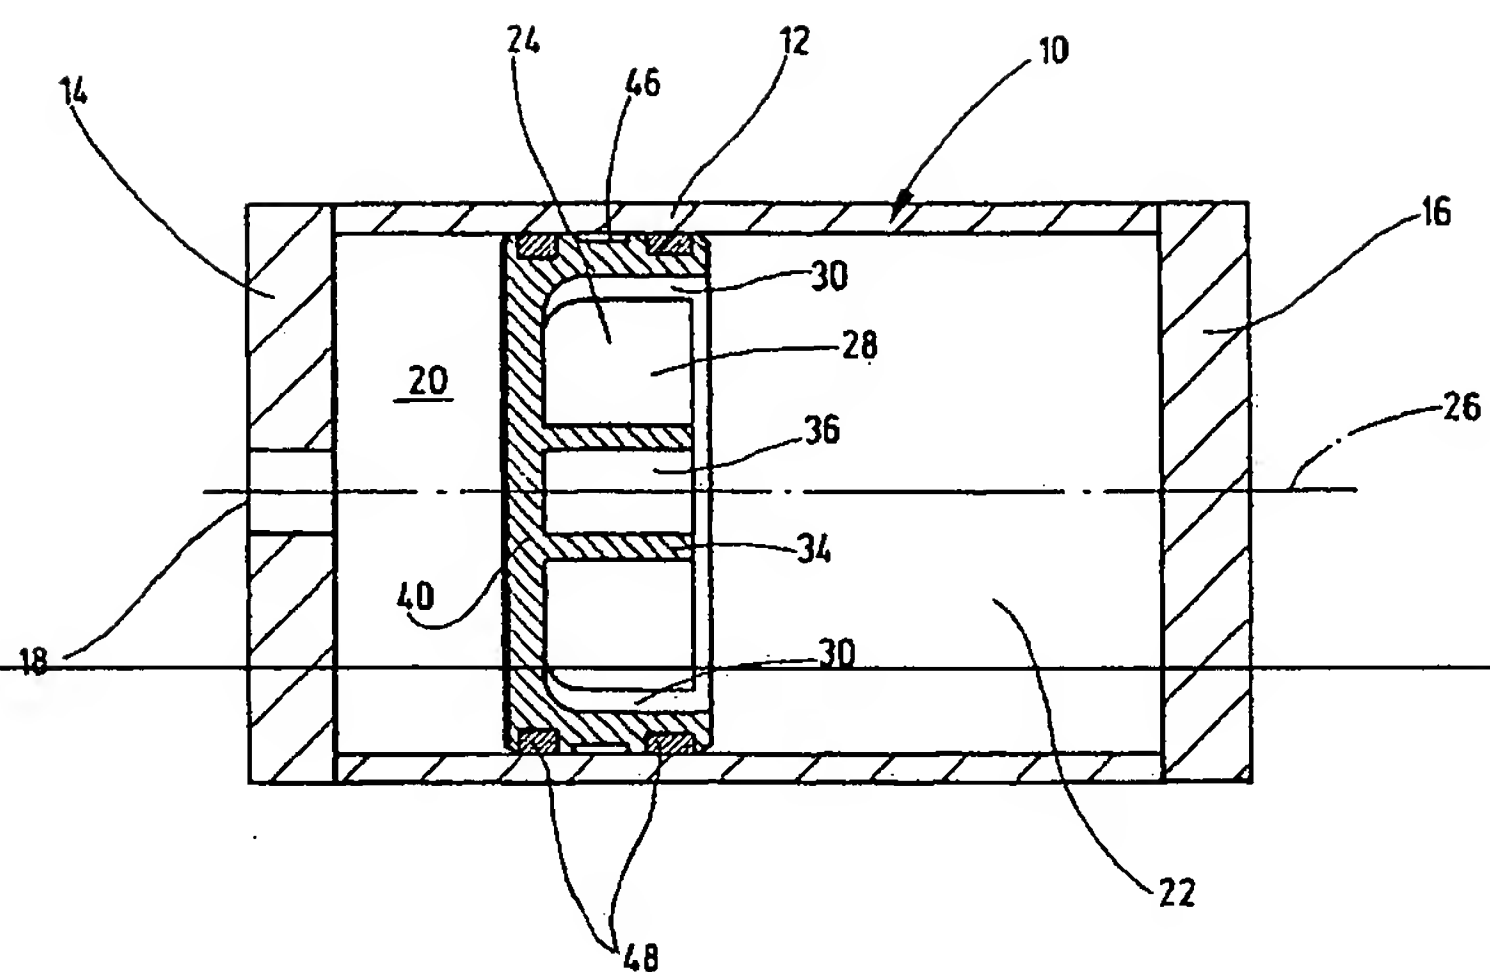

(57) Abstract: The invention relates to a piston-type accumulator comprising a separating piston (24), which can be axially displaced inside an accumulator housing (10) and which separates two spaces from one another inside the accumulator housing (10), particularly a gas side (22) from a liquid side (20) of the accumulator. Due to the fact that the separating piston (24) is predominantly or completely made of a plastic material, it can be provided with a very light weight whereby reducing the overall installation weight of the piston-type accumulator.

[Fortsetzung auf der nächsten Seite]

(84) Designated States (unless indicated otherwise, for each available type of national protective right):
 ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European Patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

With International Search Report.

Reference is made for an explanation Field of the two-
 letter codes and the other abbreviations to the Guidance
 Notes on Codes and Abbreviations in the front section of
 each regular PCT Gazette edition. Invention

Piston Type Accumulator

The present invention relates to a piston-type accumulator comprising a separating piston which is axially displaceable within the accumulator housing and which separates two spaces within the accumulator housing from each other, in particular the gas side from the fluid side of the accumulator.

Background of the Invention

Piston-type accumulators of this type with gas and fluid sides separated by an axially displaceable piston are known in a plurality of designs. The axially guiding part of the accumulator housing which surrounds the separating piston generally has the shape of a cylinder pipe, for which. For this reason, piston-type accumulators are often called cylinder accumulators. The seal areas on the piston circumference are conventionally formed by ring seals or O-ring seals which are recessed into outer circumferential grooves which are offset axially to each other in the separating piston.

For use of these cylinder or piston-type accumulators high demands are imposed with respect to their operational reliability, especially over wide temperature ranges, for example, between -40°C and +150°C. In a generic piston-type accumulator according to DE 101 39 192 A1, within the accumulator housing at a point located between the seal areas of the separating piston, a bleeding possibility has been created for drainage of leaking media passing through the seal areas. As a result of the bleeding possibility between the gas-side and fluid-side seal ~~area~~ areas in the known solution, it is ensured that media cannot pass from the gas side to the fluid side or vice versa, ~~so that for~~. ~~In this purpose a manner, this piston-type accumulator is devised which~~ retains its tightness even under extreme conditions and for long periods of use.

The separating piston ~~consisting~~ formed of a steel material is large in its axial direction of motion within the accumulator housing, and can be considered heavy in terms of weight. As a result of the associated sluggish dynamic behavior of the piston-like separating element, the known hydraulic or piston-type accumulator is less suited for applications in which the separating piston must be moved in a rapid sequence, for example, in the cases in which on the fluid side high-frequency pressure pulses are delivered into the accumulator, and for those cases in which the piston-type accumulator is supposed to entail less weight, for example, in the areas of aeronautics and astronautics.

~~On the basis of this prior art, the~~ Summary of the Invention

~~An object of the present invention is to further improve the known~~ provide improved piston-type accumulators, while retaining ~~their~~ the advantages of such conventional accumulators, such that short trigger times are possible with the separating piston and an accumulator with little weight in use is implemented.

~~This object is~~ basically achieved by a piston-type accumulator ~~with the features of claim 1 in its entirety.~~

~~_____ In that, as specified in the characterizing part of claim 1, where~~ the separating piston consists ~~is largely or completely of a plastic material, in.~~ In terms of its weight, it can be designed to be very light so that overall the installation weight of the piston-type accumulator is reduced. In this way, the piston-type accumulator ~~as claimed in the~~ of the present invention is then especially suited to use in the domains of aeronautics and astronautics and for other applications in which fundamentally weight is to be reduced. Since the separating piston ~~which is,~~ made at least partially of plastic material, has a low mass compared to the known steel pistons, it can be easily triggered and quickly reversed in the direction of motion so that when high frequency fluid pulsations are being delivered into the accumulator housing, the piston-type accumulator meets the associated requirements, especially with respect to smoothing of the pulsation flow and the like.

~~_____ In this connection it is provision is preferably made such that~~ Preferably, at least parts of the interior of the separating piston ~~consist of an~~ are formed by injection molding or are obtained by an extrusion process, ~~toward.~~ Toward the outside at least partially, a reinforcement of plastic fibers or a plastic membrane ~~being is~~ applied. In this way, the basic structure of the separating piston can be achieved cost-effectively ~~and the.~~ The necessary mechanical strength properties for the separating piston can be obtained by the applied fiber or membrane laminate of plastic, even if the separating piston is to be exposed later to high frequency pulsations in its fluid operation.

In one especially preferred embodiment of the piston-type accumulator ~~as claimed in the~~ of the present invention, the separating piston ~~consists is formed~~ of glass fiber-reinforced polyaryl amide. The plastic material used for this purpose has essentially the same coefficient of thermal expansion as the steel used ~~otherwise~~ in the prior art for the separating piston and/or of the steel material for the accumulator housing, especially in the preferred temperature range from -40°C to 120°C, ~~so that in.~~ In this respect, the same structural properties for the separating piston ~~as claimed in the~~ of the present invention are implemented as in the known solutions. In particular, the plastic separating piston has a stable shape so that it is ensured that the seal areas provided on the outer circumference of the separating piston between the separating piston and the inside of the

accumulator housing do not change, ~~so that the~~. The desired tight accumulator system is then implemented to a high degree with the piston-type accumulator solutions as claimed in the of the present invention.

In another preferred embodiment of the piston-type accumulator ~~as claimed in the of the present invention~~, the separating piston borders a cavity which is open preferably in the direction of the gas side of the accumulator housing. In this way, the volume of accumulator gas can be increased by using the cavity ~~so that for~~. For this purpose, the damping capacity of the piston-type accumulator as claimed in the of the present invention is improved.

In another especially preferred embodiment of the piston-type accumulator ~~as claimed in the of the present invention~~, within the cavity ~~there are~~, stiffening crosspieces ~~which~~, configured diametrically to the longitudinal axis of the accumulator housing, extend from this longitudinal axis to the cylindrical inside wall of the separating piston ~~which laterally borders~~ bordering the cavity. In one modified embodiment ~~provision can preferably be made such that~~, the ends of the stiffening crosspieces preferably facing away from the inside wall end in a cylindrical hollow receiving ring within the separating piston. Due to the stiffening crosspieces ~~which extend~~ extending radially from the center of the separating piston to the outside, the ~~indicated~~ sealing area is stiffened toward the inside wall of the accumulator housing relative to the separating piston, and the sealing elements provided on the outer circumference of the separating piston and optionally guide strips are kept in contact with the inside of the accumulator housing.

~~———— The piston-type accumulator as claimed in the invention will be detailed below using different exemplary embodiments as shown in the drawings. The figures are~~ Other objects, advantages and salient features of the present invention will become apparent from the following detailed description, which, taken in conjunction with the annexed drawings, discloses preferred embodiments of the present invention.

Brief Description of the Drawings

Referring to the drawings which form a part of this disclosure:

FIG. 1 is a schematic and, not to scale:

FIG. 1 shows a longitudinal, side elevational view in section through the of a piston-type accumulator as claimed in the according to a first exemplary embodiment of the present invention, with a separating piston axially displaceable within the accumulator housing;

FIGS. 2a and 2b show in are a top plan view and a side elevational view in a longitudinal-section taken along line II-II from of FIG. 2a, respectively, of the separating piston shown in FIG. 1; and

FIGS. 3a and 3b show in are a top view and in a longitudinal section plan view and a side elevational view in section taken along line III-III from of FIG. 3a a modified embodiment of a separating piston which can replace the separating piston shown in FIG. 3a, respectively, of a separating piston according to a second exemplary embodiment of the present invention that can be used in the accumulator of FIG. 1.

Detailed Description of the Invention

The piston-type accumulator shown in FIG. 1 has an accumulator housing ~~designated as a whole as~~ 10 with a cylindrical jacket or housing 12 (cylinder pipe) ~~which is sealed on the end side sides~~ by two cover parts 14, 16. The cover part 14 ~~which is, the left one as viewed in the direction of looking at FIG. 1,~~ has a fluid connection 18 ~~which makes it possible to connect for connecting the separating piston to the piping or conduits of the a hydraulic system which is (not detailed shown), to carry fluid, in order in this way to connect the hydraulic system to the fluid side 20 of the separating piston.~~ The cover part 16 ~~which is, the right one as viewed in the direction of looking at FIG. 1~~

~~within the cylindrical jacket 12,~~ encloses a gas space 22, which can be filled, for example, with nitrogen gas, within the cylindrical jacket 12.

To refill the gas space 22 ~~which is,~~ also called the gas side of the separating piston, a replenishing valve (not shown) located in the cover part 16 can be used. To separate the fluid side 20 from the gas side 22, within the accumulator housing 10 with its cylindrical jacket 12 ~~there is,~~ a separating piston 24 ~~which is~~ axially displaceable back and forth depending on the system state of the separating piston along its longitudinal axis 26. This structure of a separating piston is prior art so that it will not be detailed here.

In contrast to the known or conventional solutions in which the separating piston ~~consists~~ is ~~formed~~ of a steel material, the ~~solution as claimed in the invention consists~~ separating piston 24 of the present invention is formed largely or preferably completely of a plastic material ~~with reference to the separating piston 24.~~ The separating piston 24 overall can be formed from a plastic injection molding, and or built up in multiple layers ~~can be obtained~~ using a conventional extrusion process; especially. Especially good strength values for the separating piston 24 have ~~however~~ resulted, if it is built up in this way on its inside and to the outside with a reinforcement of plastic fibers or a plastic membrane ~~is applied~~ in the form of a laminate. It has proven especially advantageous to build the separating piston 24 from glass-fiber reinforced polyaryl amide, ~~since with.~~ With this ~~structure material,~~ the separating piston 24 has essentially the same coefficient of thermal expansion as the steel material from which the cylindrical jacket 12 of the accumulator housing 10 is formed, in addition to the ~~indicated~~ cover parts 14, 16. In the preferred operating or temperature range of the accumulator from approximately 40°C to 120°C or higher, the separating piston 24 thus behaves like the steel material surrounding it, with the result that seal problems due to possible temperature fluctuations in the material with different coefficients of thermal expansion are avoided.

As the figures furthermore show, the separating piston 24 borders a cavity 28 which is open in the direction of the gas side 22 of the separating piston 10. In this way, the accumulator capacity

for the working gas within the piston-type accumulator can be increased, and accordingly its ability to ~~damp~~dampen fluid shocks delivered on the fluid or fluid side 20 of the piston-type accumulator. Furthermore the formation of the cavity 28 reduces the weight of the moving separating piston 24; ~~this~~. This weight reduction also benefits the reduction of mass inertia so that the separating piston 24 ~~as claimed in the~~of the present invention can be triggered very rapidly into its dynamic behavior ~~and especially~~. Especially, its direction of motion in the accumulator housing 10 can be immediately reversed depending on the operating state.

Within the cavity ~~26 there are~~28, stiffening crosspieces 30 ~~which, running extend~~ diametrically to the longitudinal axis 26 of the accumulator housing 10, and extend from the axis to the cylindrical inside wall 32 of the separating piston 24, which wall laterally borders the cavity 28 ~~for this purpose~~. As a result of this stiffening by ~~way of~~ the stiffening crosspieces 30, the separating piston 24 can be made very light in terms of its weight, and is still designed to have high strength for ~~forthcoming~~ processing tasks, ~~to which the~~. The aforementioned glass fiber reinforcement also contributes to this high strength. For the two embodiments shown in FIGS. 2 and 3, there are a total of six stiffening crosspieces 30 which can also be accordingly increased or decreased in number depending on the forces which occur. In the embodiment shown in FIGS. 1 and 2, the ends of the stiffening crosspieces 30 which face away or are remote from the inside wall 32 ~~discharge into~~ are coupled to a cylindrical receiving ring 34 within the separating piston 24; ~~this~~. This structure leads to an increase in the stiffness of the overall system, since the free path length of the stiffening crosspieces 30 on which they could collapse under load is reduced accordingly. For purposes of a lightweight construction ~~in turn~~, the receiving ring 34 has a middle cylindrical recess 36 ~~which run~~extending coaxially to the longitudinal axis 26 of the accumulator housing 10 and of the separating piston 24. The stiffening crosspieces 30 are made rectangular in cross section, and extend over the entire height of the cavity 28 so that the outer ring 38 of the separating piston 24 is stiffened over its entire axial ~~travel length~~, ~~to which the~~. A bottom part 40 also contributes, ~~on which viewed~~ to this stiffening. Viewed in the axial travel direction, both the stiffening crosspieces 30 and ~~also~~ the receiving ring 34 are supported on the end side of the bottom 40.

Furthermore, the separating piston 24, along its outer ring 38 has groove-like recesses 42, 44, and 46, ~~the~~. The recesses 42 and 44 beingare used to hold seals 48, especially formed from a gasket, ~~consisting~~formed of elastomer material. The interposed recess 46 can be used to hold a guide strip ~~which is (not detailed in order in this way shown)~~ to facilitate the longitudinal traveling motion of the separating piston 24 on the inner circumferential side of the cylindrical jacket 12. The guide can also be molded on as a ring, ~~in~~. In a special production process, a different ~~material~~material for the guide can also be molded together in the mold. In this way special material, with special sliding properties can be used for the guide.

The modified embodiment shown in FIGS. 3a, 3b corresponds for the most part to the embodiment ~~as shown in FIGS. 1 and 2, only instead~~. Instead of the receiving ring 34 with a central middle recess 36, ~~there being~~ a linkage point member 50 for the stiffening crosspieces 30 ~~extending from there~~extends axially in a star shape from the middle of bottom 40.

While various embodiments have been chosen to illustrate the invention, it will be understood by those skilled in the art that various changes and modifications can be made therein without departing from the scope of the invention as defined in the appended claims.

What is claimed is:

PISTON-TYPE ACCUMULATOR

Abstract of the Disclosure

A piston-type accumulator includes a separating piston (24) axially displaced inside an accumulator housing (10) and separating two spaces from one another inside the accumulator housing (10), particularly a gas side (22) from a liquid side (20) of the accumulator. Due to the fact that the separating piston (24) is predominantly or completely made of a plastic material, it can be provided with a very light weight reducing the overall installation weight of the piston-type accumulator.